




Perimeter Detection Systems

G-FENCE 600 & G-FENCE 600Z

Fence Detection Systems

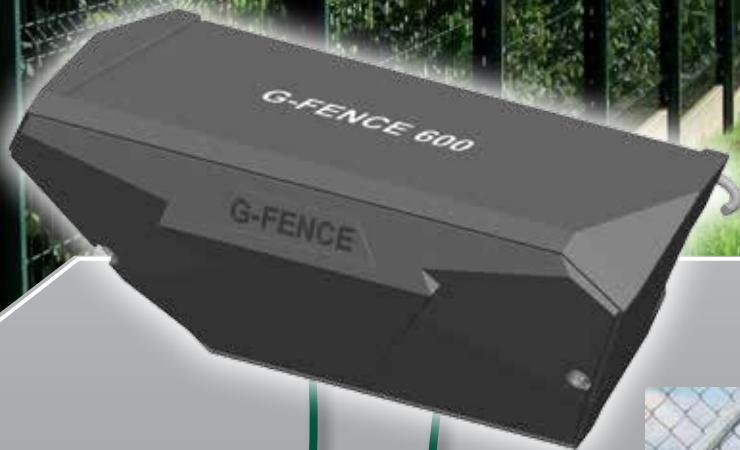

- 10 detection zones
- Control of video systems

Zoning Option



- Remote maintenance
- Sensitivity adjustment at distance
- Event log history

Integrated web server



Easy Installation

- 600m (1968 ft) perimeter maximum
- Auto calibration of the sensors
- Simple and quick installation with tie-wraps
- Passive cable, only the sensors detect




G-FENCE 600 Z Control Unit board

Zoning Option





Available on G-FENCE 600 Z

- Up to 10 detection zones
- Dry contact board integrated inside the control unit
- Control of video systems

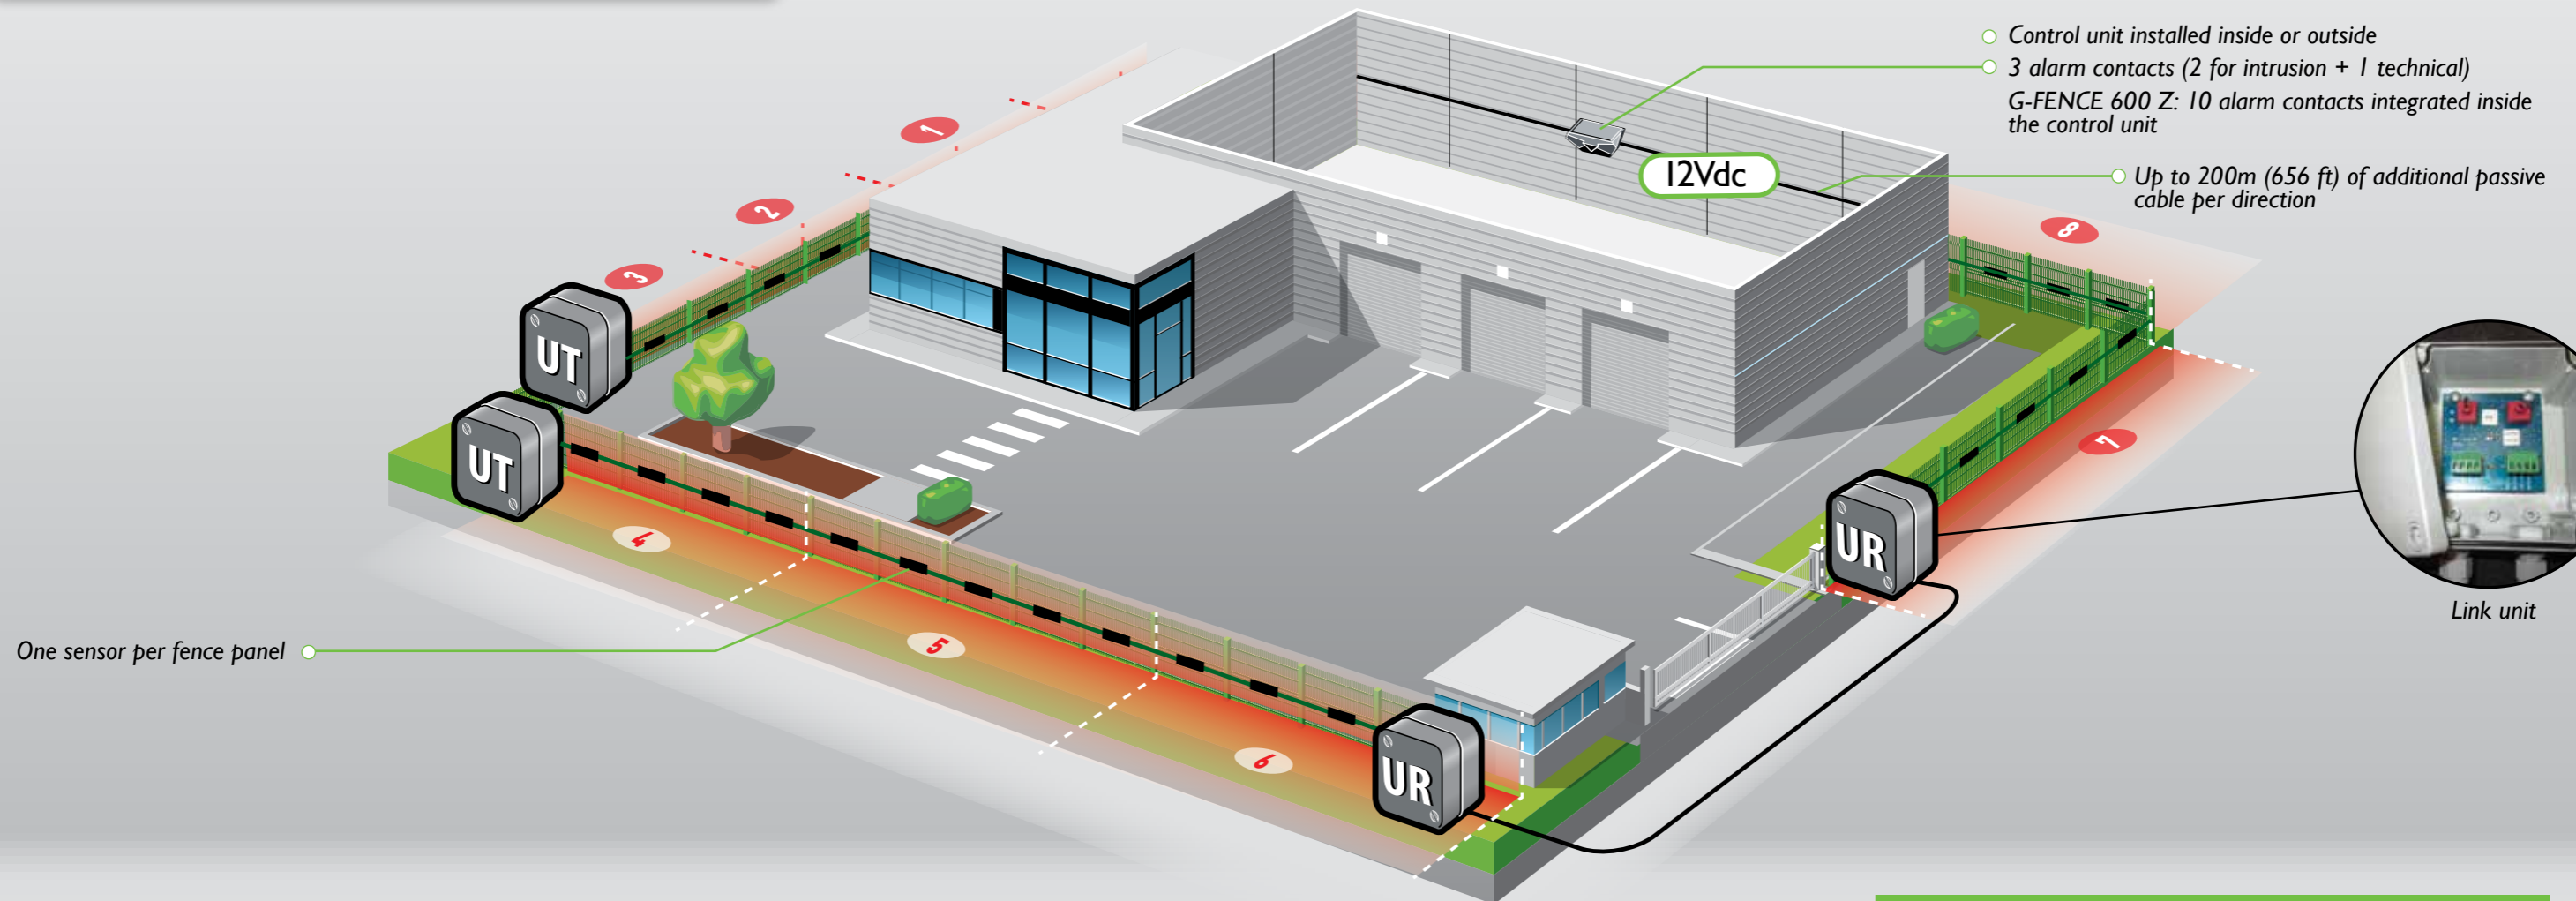

Simple offer

- Only 4 references:
 - Cable
 - Control unit
 - Control unit with zoning option
 - Termination / Link unit

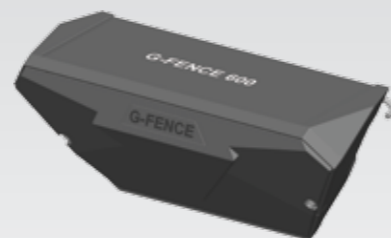


Integrated web server



- Detection adjustment and maintenance at distance
- Event log history
- Intrusion localisation

Technical Characteristics

Power supply	12Vdc
Alarm outputs	2 intrusion alarms (1 per zone) + 1 technical alarm
Operating temperature	From -35°C up to +70°C (from -31°F up to 158°F)
Electromagnetic compatibility	Compliance with European standards (label CE)
Installation	1 sensor per fence panel - up to 200m (656 ft) of additional passive cable per cable start
Configuration	Auto-calibration - Sensitivity adjustment per sensor/zone at distance or locally without software
Remote maintenance	Integrated web server - Up to 1000 event log history

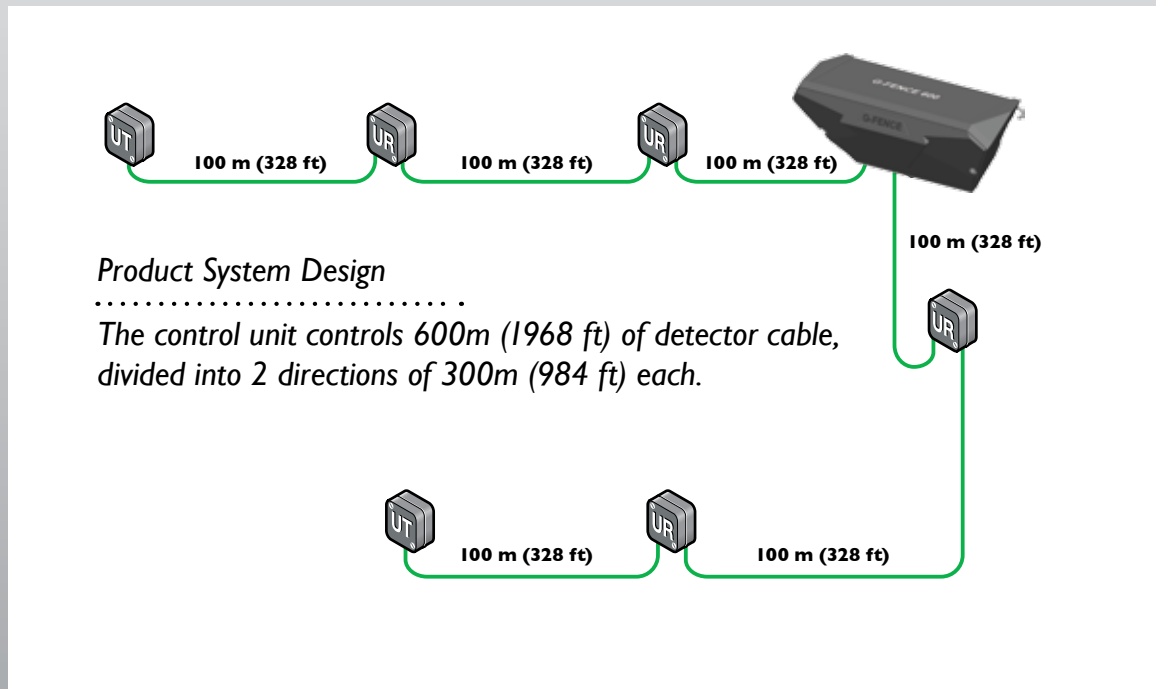

System

Ref. 40670201	Control Unit G-FENCE 600 - 3 alarm outputs - Inside / Outside installation
Réf. 40670205	Control Unit G-FENCE 600 Z - 11 alarm outputs - Inside / Outside installation
Ref. 40670202	100m roll of detector Cable including 40 sensors - Green colour (RAL 6500)
Ref. 40670204	Termination / Link Unit - UR/UT G-FENCE 600
Ref. 81100081	Outdoor Power Supply/Charger 110/230Vac 50/60Hz / 13.6Vdc - 2.2A - IP56 watertight plastic housing
Ref. 35145000	Battery 12V 1.2Ah for power supply 81100081
Ref. 93375007	Tie wraps - 26A1010 (bag of 1000) - 1 bag for 500m (1640 ft) of cable



Stamp of the retailer

Lokalny dostawca systemów Sorhea

info@weber-systems.pl
 www.weber.pl

In order to continuously ensure the high standard of quality and performance of our products, we reserve the right to modify the present technical data without notification.

